

Charging the Battery

- 1) Plug the CHARGER JACK into the CHARGER PORT on the top front of the NiMH BATTERY PACK.
- 2) Plug the CHARGER into a wall outlet. The CHARGING INDICATOR LED lights up red indicating the unit is charging. Charge the battery for 8-12 hours or until CHARGING INDICATOR LED is flashing red, indicating the battery is fully charged.
- 3) The Plug-and-forget feature allows you to leave the battery plugged in full time. The battery charges fully and shuts off when full charge is achieved. The CHARGING INDICATOR LED will then flash red.

□

WARNING:

- * The recharging unit is for indoor use only and is designed only for use with this lighting system.
- * The battery and the charger will become warm during charging. If either becomes too hot to touch, discontinue charging and contact your dealer.

□

PRECAUTION:

- * Once the battery is fully charged the Plug-and-forget feature stops charging the battery. Any disruption of power will reset the Plug-and-forget feature, even though the battery may be fully charged.
- * If the battery is not used for a long period of time, charge it once every three months to maintain the life of the Nickel Metal Hydride (NiMH) battery.
- * To ensure maximum run time, make sure your batteries are fully charged before use.
- * During long periods of non use, unplug the charger from the battery pack.

□

□

□

□

□

ALKALINE Battery Installation

- 1) Remove the BATTERY CARTRIDGE from the back of the light case by pushing the BATTERY RELEASE button on the underside of the light case.
 - 2) Insert 4 "AA" batteries matching the + and - to diagram on the BATTERY CARTRIDGE.
 - 3) Insert BATTERY CARTRIDGE into the light case so that the METAL CONTACTS at the end of the cartridge are in the up position.
- NOTE: Battery cartridge will click into place when installed properly.

□

□

□

□

Operating the Light

- 1) To turn the light on, press and hold the POWER SWITCH for 1-2 seconds.
- 2) To change to LOW or HIGH power, simply press and release the POWER SWITCH.
- 3) To turn the light off, press and hold the POWER SWITCH for 1-2 seconds.



WARNING: When the battery power is getting low, only the LOW power beam setting will function.

□

QuickCam™ Bracket Installation

- 1) Wrap bracket clamp around handlebar as shown in diagram.
- 2) Adjust bracket clamp tension on handlebar by rotating cam lever clockwise to tighten and counterclockwise to loosen (as shown in diagram to right).

Bulb Specification: Xenon 4.8V 0.7A
 Wattage: 3.5 Watts
 Run Times:
 High Power (5000 Candlepower) = 1.5-2 hrs
 Low Power (3000 Candlepower) = 3-4 hrs

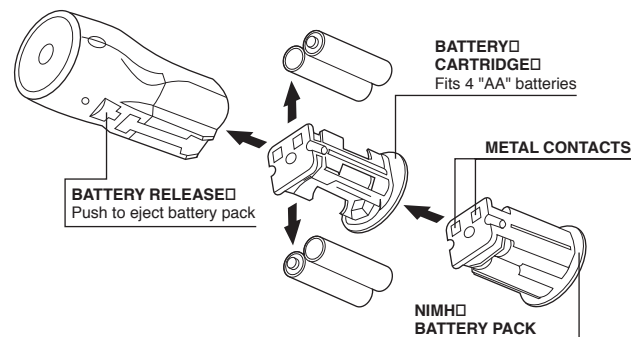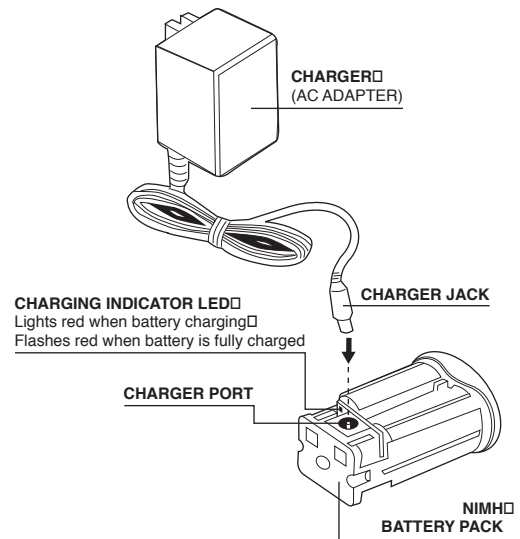

POWER SWITCH
 Press and hold for ON/OFF.
 Press and release for HIGH-LOW beam

