


AIRSMITH CO² INSTRUCTIONS

Pump Head Setup / French French French

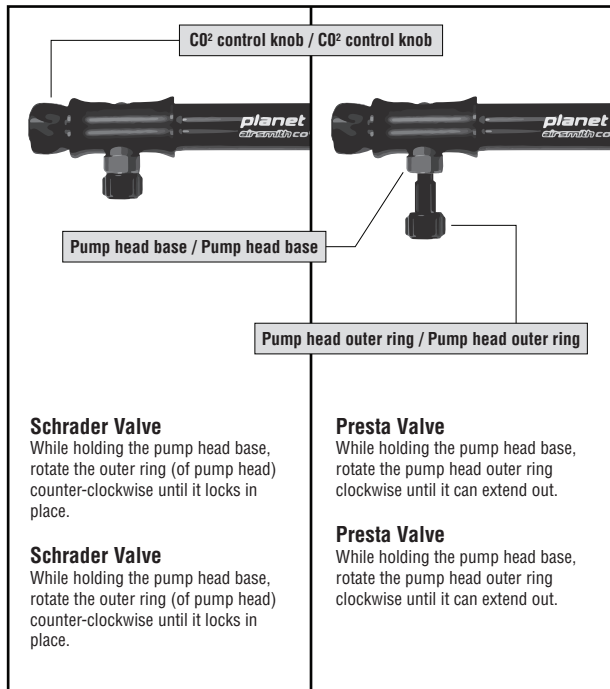

Use with CO² Cartridge:

1. Close CO² control knob on pump by turning clockwise until tight. Then thread cartridge clockwise into CO² control knob.
2. Prepare the pump head to valve type needed (see diagram). Attach the pump to the valve on tire by turning the pump head outer ring clockwise.
3. Once pump head is securely attached to valve, slowly open control knob and inflate to desired pressure. CAUTION: Avoid skin contact with metal cartridge and pump during and immediately after inflation due to the cartridge freezing.
4. If additional air is needed, close the CO² control knob and pump to desired pressure.
5. Remove pump head from valve by turning the pump head outer ring counter clockwise.
6. Be sure all CO² is released from cartridge before removing cartridge from pump.

Use as pump only:

1. Close CO² control knob on pump by turning clockwise until tight.
2. Prepare the pump head to valve type needed (see diagram). Attach the pump to the valve on tire by turning the pump head outer ring clockwise.
3. Once pump head is securely attached to valve, pump to desired pressure.
4. Remove pump head from valve by turning counter-clockwise.

Special notes:

Always follow tire manufactures inflation recommendations.
Always store in Schrader valve setup.
For most current instructions, visit www.planetbike.com

Use with CO² Cartridge:

1. Close CO² control knob on pump by turning clockwise until tight. Then thread cartridge clockwise into CO² control knob.
2. Prepare the pump head to valve type needed (see diagram). Attach the pump to the valve on tire by turning the pump head outer ring clockwise.
3. Once pump head is securely attached to valve, slowly open control knob and inflate to desired pressure. CAUTION: Avoid skin contact with metal cartridge and pump during and immediately after inflation due to the cartridge freezing.
4. If additional air is needed, close the CO² control knob and pump to desired pressure.
5. Remove pump head from valve by turning the pump head outer ring counter clockwise.
6. Be sure all CO² is released from cartridge before removing cartridge from pump.

Use as pump only:

1. Close CO² control knob on pump by turning clockwise until tight.
2. Prepare the pump head to valve type needed (see diagram). Attach the pump to the valve on tire by turning the pump head outer ring clockwise.
3. Once pump head is securely attached to valve, pump to desired pressure.
4. Remove pump head from valve by turning counter-clockwise.

Special notes:

Always follow tire manufactures inflation recommendations.
Always store in Schrader valve setup.
For most current instructions, visit www.planetbike.com